



STEP | 1

- A.** Insert the curved Frame Tubes through the holes at the end of the Base Material.

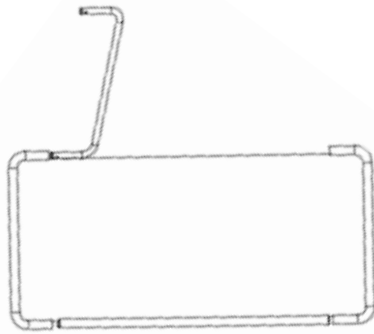


- B.** Slide the straight Frame Tubes through the holes along the side of the Base Material.

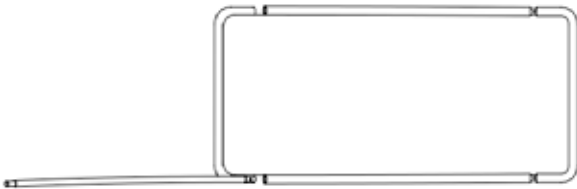

STEP | 2

Connect the Frame Tubes together.

Ensure that the bolt holes in all parts line up.

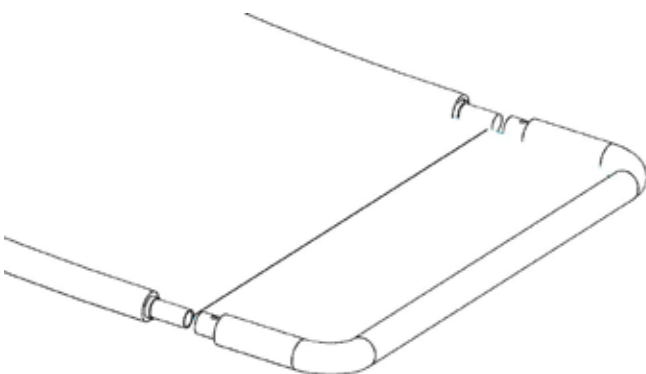

STEP | 3

Insert the bolts at the end of the Ropes into the holes to secure the Frame Tubes together.



Make sure that you insert the locking nut first, then attach the cap nut.



STEP | 4

VULY MINI:

- A.** Remove the first set of carabiners on both sides of the Swing.
- B.** Unlock the carabiners on your Swing, and hook them into the lugs on the Swing Rail.

Ensure that both carabiners are facing the same direction and have been firmly tightened.

VULY MAX:

Unlock the carabiners on your Swing, and hook them into the lugs on the Swing Rail.

Ensure that both carabiners are facing the same direction and have been firmly tightened.

CONGRATULATIONS!

You have attached the Bed Swing
to your Swing Set.

ATTENTION!

Safety information, installation and use instructions.

Read prior to installing and using the swings.

See **VulyPlay.com/support** for any updates to these instructions.

WARNING!

- Minimum user age – 6 years. Only for domestic and outdoor use.
- Maximum user weight per swing station – 80 kg (175 lb) [65 kg (132 lb) on Spin Swing].
- Maximum combined user weight per swing set section – 150 kg (330 lb).
- Adult assembly required. Adult supervision required at all times.
- Ensure that the Swing Set is secured with anchors or bolts before use.

Vuly Play

95 Ingleston Rd, Brisbane QLD 4154

AU: 1300 667 514

US: 1-800-467-1421

www.vulyplay.com

